

# FLOS

■ F6602030 Black

## Taccia

Designed by Achille and Pier Giacomo Castiglioni, 1962


28W - 2700K



Table lamp providing indirect and reflected light. Reflector in painted aluminium, gloss white on the outside and matt white on the inside. Directionable diffuser in transparent mouth-blown glass. Body in black, matt white, silver anodized or bronze anodized aluminium. Base in nickel-plated metal. Electric cable of useful length 220 cm, with dimmer switch for ON/OFF and adjustment of the light flow between 10-100%. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

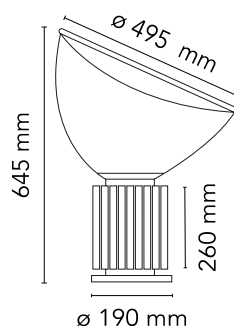

### Main specifications

|                   |                     |
|-------------------|---------------------|
| Mounting          | Table floor         |
| Environments      | Indoor dry location |
| Light Source Type | LED                 |
| LED type          | LED array           |
| Power (W)         | 28                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Black |
| Length (mm)         | 190   |
| Cord length (mm)    | 2200  |
| Net weight (kg)     | 10.74 |
| Package height (mm) | 0     |
| Package width (mm)  | 0     |
| Package length (mm) | 0     |
| Package volume (m3) | 0.18  |
| IP internal         | 20    |

### Download


|                       |                     |
|-----------------------|---------------------|
| Mounting instructions | <a href="#">PDF</a> |
| Mounting instructions | <a href="#">PDF</a> |
| Spare Parts           | <a href="#">PDF</a> |

### Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D



Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user



|    |
|----|
| IP |
| 20 |


## Photometric

|                    |            |
|--------------------|------------|
| Lighting type      | Indirect   |
| Light distribution | Asymmetric |
| CCT (K)            | 2700       |

## Electrical

|                      |                        |
|----------------------|------------------------|
| Insulation class     | III                    |
| Frequency (Hz)       | 50/60                  |
| Main voltage (Vac)   | 100-240/48             |
| LED voltage Vf (Vdc) | null                   |
| Driver               | Remote included        |
| Dimmable             | Yes                    |
| Dimming type         | Electronic 48V         |
| Dimming interface    | Dimmer Integrated      |
| Plug type            | Type G, Type A, Type C |
| Batteries inside     | No                     |

## Spare Parts

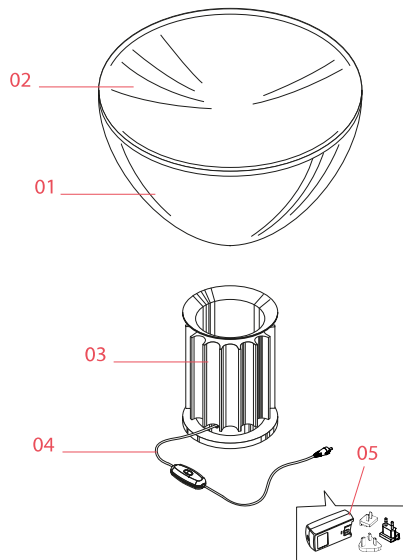

- |     |   |           |
|-----|---|-----------|
| 01. | Taccia transparent diffuser & reflector | F6510000  |
| 02. | White reflector                         | RF00780   |
| 03. | Black base                              | F6608030  |
| 04. | Jack plug with cable and push dimmer    | RF6608100 |
| 05. | Black plug assembly kit & 48V driver    | RF3320400 |

**DOWNLOAD**



F6510000  
Taccia transparent diffuser &  
reflector



RF00780  
White reflector



F6608030  
Black base



RF6608100  
Jack plug with cable and push  
dimmer



RF3320400  
Black plug assembly kit & 48V  
driver