

# FLOS

F0002009 Glossy White


## Skygarden 2

Designed by Marcel Wanders, 2007



Halogen - 205W

Suspension luminaire providing diffused lighting. Hemispherical, mechanically-processed cast plaster diffuser, painted white inside. Outer finish: rust, glossy black, glossy white or matte gold. Plaster diffuser support in die-cast aluminum alloy. Upper cable gland and blocking ring nut in black injection-molded PC. Shaped, adjustment screws. Transparent, injection-molded, upper and lower silicone shock absorbers. Lampholder and fixing support in PPS. Flashed and blown opal glass diffuser. Molded fixing ring nut in die-cast aluminum alloy with alodine plating. Frieze in photo-etched and mechanically drawn AISI 304 steel. Molded and galvanized steel ceiling attachment. Gray, injection-molded PC rose, painted the same color as the body.

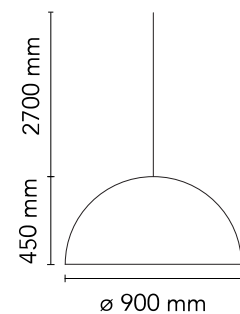

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607012895
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of heads	1
Power (W)	205

### Physical

Colour	Glossy White
Length (mm)	900
Cord length (mm)	2700
Canopy dimension (mm)	86
Canopy width (mm)	172
Net weight (kg)	29
Package height (mm)	680
Package width (mm)	1120
Package length (mm)	1120
Package volume (m3)	0.85
IP internal	20

### Download

<a href="#">Mounting instructions</a>	<a href="#">↓ PDF</a>
<a href="#">Spare Parts</a>	<a href="#">↓ PDF</a>

### Photometric Files

<a href="#">LDT / IES</a>	<a href="#">↓ LDT</a>
---------------------------	-----------------------


### Technical Drawings

<a href="#">2D</a>	<a href="#">↓ ZIP</a>
<a href="#">3D</a>	<a href="#">↓ ZIP</a>
<a href="#">Bim</a>	<a href="#">↓ ZIP</a>



IP
20

## Schematic light drawing



Beam Angle: 118°

h(m)	E(lx)	D(m)
1	729	3.36
2	182	6.72
3	81	10.08
4	46	13.44
5	29	16.79

Luminous flux luminaire  
4210 lm


## Photometric

Lighting type	Direct
Light distribution	Symmetric

## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Bulbs




NOT INCLUDED

RF29388

LED T46 Lamp E27 20W 2700K

Dimmable

## Spare Parts

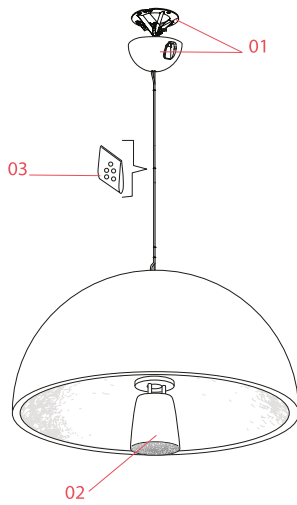

- |     |                             |           |
|-----|-----------------------------|-----------|
| 01. | White ceiling rose assembly | RF6420209 |
| 02. | Glass diffuser assembly     | RF6420100 |
| 03. | Kit of 5 or rings           | RF05382   |

**DOWNLOAD**



RF6420209

White ceiling rose assembly



RF6420100

Glass diffuser assembly



RF05382

Kit of 5 or rings